
STP995 P3 Red Console

Technical data sheet

Part Number: 107585



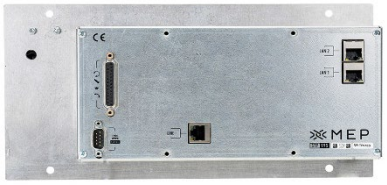

DESCRIPTION:

The STP995P3 RED is a red 5.7” touchscreen Controller Working Position (CWP). The CWP is equipped with a 560CD/m2 VGA touch screen. The unit can be mounted in a standard 19” rack or by VESA 100 mounting holes.

It can be delivered with a handset. The panel has two volume knobs, a touch PTT button a speaker, an internal microphone and two LEMO connectors for a handset and headset. At the rear, there is an extension connector to connect more audio modules. The STP995 has two IP interfaces and redundant power input.

FEATURES:

- Resistive touch screen
- Configurable Avatar interface
- Realtime clock with battery
- Footswitch connection

PARAMETER	SPECIFICATION
Connections	2 Ethernet connections E1 connection (with module)
Power	12V
Dimensions	302 x 152 x 52 mm
Touch Interface	Screen Resolution 640 x 480 Screen size 5.7” Viewing angle 135° (Horizontal & Vertical) Brightness 480 cd/m^2
Audio	Internal loudspeaker Internal microphone or gooseneck microphone Handset connection Headset connection 2 External loudspeaker connections External microphone connection 2 Internal volume controls 2 External connections for volume control Voice logging connection User-configurable audio routing and level control
Applications	Switchless Switch in combination with TCS990 ED137 compatible
EMC	EN55032, EN55035
Safety	EN62368-1
Temperature	-10°C to 50°C (fanless)

Although Jotron strives for accuracy in our datasheets, errors may occur. Please contact Jotron for the latest information as design and specifications may change without notice. JOTRON is certified to NS-EN ISO 9001 / 14001 / 27001 and EASA has approved Jotron as a Design and Production Organization.