


1 Mounting the bracket on a flag buoy

For optimal signal range, install the bracket so that the Tracker is as high as possible above the water, but still below the flags.

Note: According to regulatory requirements, the allowed antenna height is limited to 1 meter above the waterline. The antenna height is measured from the top of the bracket to the waterline.

Please note that using an aluminum pole will affect the range.

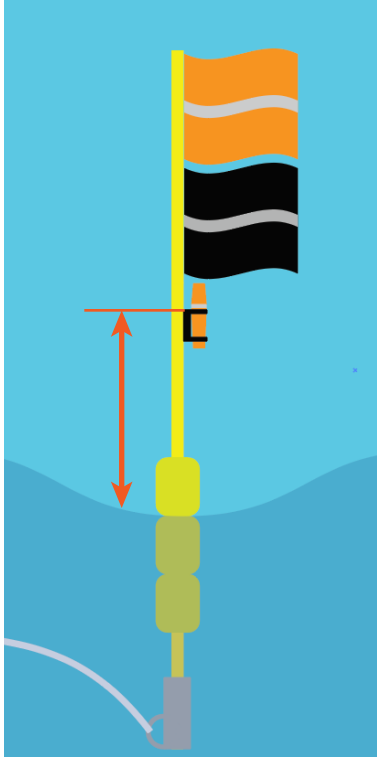


Quick start MANUAL

TronTracker TA10 Tracker


Serial no:	
AMRD ID:	
PIN:	



Before mounting the bracket on the pole, drill 2 holes with a diameter of 6 mm in the pole. The bracket can be used as a drilling template.

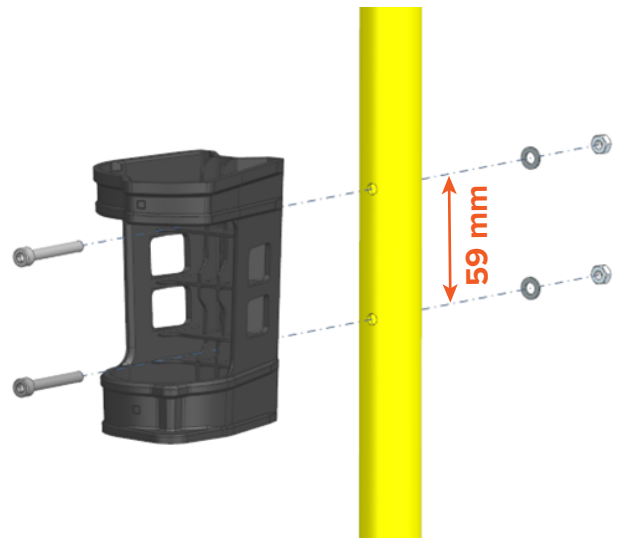

2 Placing the Tracker in the bracket

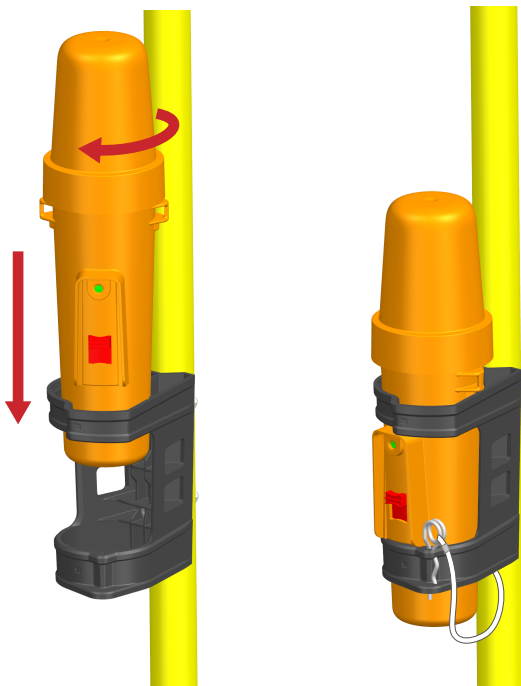






Place the Tracker in the bracket and rotate to lock it.

Use the locking pin for additional security.

3 Activation

Push the switch upwards to activate the Tracker. The indicator light will follow the sequence shown below.



- | | | |
|----|--|---|
| 1. |  20–100 %
Charging not needed
 5–20 %
Charge when possible
 0–5 %
Charge immediately | Lights up green, yellow or red to indicate remaining battery capacity. |
| 2. |  | Flashes blue to indicate that Bluetooth is active and the Tracker can be connected. |
| 3. |  | Flashes green to indicate that the Tracker is active. |

4 App installation



Apple - App Store

Download the Jotron TronTracker mobile app from App Store or Google Play.




Android - Google Play

5 First time setup of the Tracker

To connect to the Tracker, place it in the charger or turn the Tracker on to activate Bluetooth. (Bluetooth is always active when the Tracker is placed in the charger. If it's not in the charger, Bluetooth remains active for the first minute after turning it on).



In the TronTracker app, first register your vessel. See the RA10 Quick Start Manual for details. Then select your Tracker from the list of discovered devices and tap **'Add to Vessel'**.

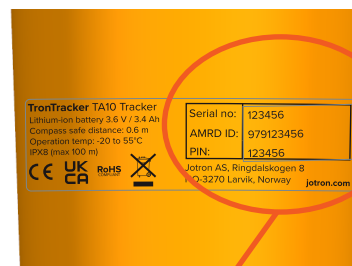

The first time you connect to the Tracker you'll be prompted to enter a PIN code. This code is unique to each device and can be found on a label on the back side of the Tracker and on the front page of this manual.

Important: Store your PIN code in a safe place, as it will be required if the product is reset.

6 Setting preferences

The Jotron TronTracker app can also be used to set several preferences. For more information, please refer to the app.

To connect to the Tracker, first activate Bluetooth, then select it from the list under your vessel and tap **'Connect'**.

The Tracker has two different transmission power settings:

- Low power - Compliant with ITU AMRD-B specifications
- High power - Exceeds AMRD-B limitations but offers extended range

Use of the high power setting may not comply with local regulations. Users are responsible for ensuring legal use in their region.


Jotron AS accepts no liability for unauthorized use.

7 Charging

The BC10 Dual Charger can charge two Trackers simultaneously. Place the Tracker in the charger and rotate to lock it.

While charging, the indicator on the Tracker will show the charging status.

A red light indicates that the Tracker is not charging. This typically occurs if the battery temperature is outside the charging range of +5°C to +40°C.

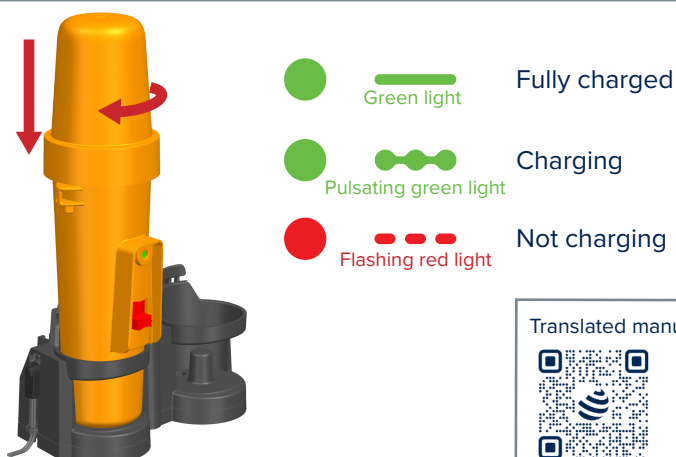

Translated manuals:



jotron.com